



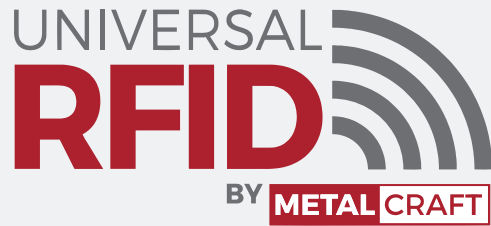


ACCESS CONTROL RFID PRODUCT COMPARISON GUIDE






Toll Free: 800-437-5283
Outside USA: 641-423-9460

Product Name						
Typical Applications		Gated Communities Car Washes Parking Garages	Gated Communities Car Washes Parking Garages	Gated Communities Car Rental Assets Parking Lot Management	Events, Conferences, Trade Shows	Events, Conferences, Trade Shows
RF Specifications	Frequency Range (MHz)	860-960 MHz	US 902-928 MHz EU 865-868 MHz	860-960 MHz	13.56 MHz	US 902-928 MHz EU 865-868 MHz
	Read Range (ft)	20 ft.	20 ft.	25 ft.	Inches	9.8 - 13.1 ft.
	Material Compatibility	Plastic, Glass	Glass	Plastic, Glass	Human body	Human body
	IC type	Monza 4D	Alien Higgs 3	Alien Higgs 3 - Standard or Large	NTAG 213 or SLIX	Alien Higgs 3
Physical & Environmental	Encasement / Material	Engineering Grade Polyester	.002 in. Destructible Material	Polyester	Polycarbonate or Polyester	Polycarbonate or Polyester
	Size (in)	4 x 1 in.	4.1875 x 1.25 in.	Standard: 3.5 x 3.5 in. Large: 3.50 x 6.50 in.	3 x 5 in.	3 x 5 in.
	Weight (g)	1g	1.5 g	1 g	11.7 g	11.7 g
	Operating Temperature (C)	- 40° C to 70° C	- 40° C to 85° C	- 40° C to 70° C	- 40° C to 85° C	- 40° C to 70° C
	Attachment	Pressure Sensitive Adhesive	.002 in. Pressure Sensitive Adhesive	Hanging	Lanyard	Lanyard



ACCESS CONTROL RFID PRODUCT COMPARISON GUIDE

Toll Free: 800-437-5283
Outside USA: 641-423-9460

Product Name						
Typical Applications		Waterparks, Amusement Parks, Camps, Sporting Events	Waterparks, Amusement Parks, Camps, Sporting Events	Festivals, Fairs, Entertainment Venues, Amusement Events	Festivals, Fairs, Entertainment Venues, Amusement Events	Housing, Rental, & Storage Units
RF Specifications	Frequency Range (MHz)	13.56 MHz	US 902-928 MHz EU 865-868 MHz	13.56 MHz	US 902-928 MHz EU 865-868 MHz	US 902-928 MHz EU 865-868 MHz
	Read Range (ft)	Inches	3 ft.	Inches	3 ft.	9.8 - 13.1 ft.
	Material Compatibility	Human Body	Human Body	Human Body	Human Body	NA
	IC type	NTAG 203 or SLIX	Alien Higgs 3	NTAG 23 or SLIX	Alien Higgs 3	Alien Higgs 3
Physical & Environmental	Encasement / Material	Polyester	Polyester	Polyester	Polyester	Encasement Polyester
	Size (in)	15.75 x 1.5 in.	3 x 5 in.	9.75 x 1 in.	9.75 x 1 in.	2.75 x 1 in. 0.3125 in. hole
	Weight (g)	1.7 g	1.7 g	1g	1g	1.75g
	Operating Temperature (C)	- 40° C to 85° C	- 40° C to 85° C	- 40° C to 85° C	- 40° C to 70° C	- 40° C to 70° C
	Attachment	Snap Closure	Snap Closure	Adhesive Closure	Adhesive Closure	Hanging Tag with Grommet